



Portining scale CRS SERIES



Model:

CRS-5000/10000
CRS-1000/20000
CRS-15000/30000

Product features

- Available in 10000 lb, 20000 lb ant 30000 lb capacities.
- Toggles between kg and lb units.
- Solid construction.
- Rechargeable battery.
- Ideal for steel industry

Product highlights



Wireless remote control



High visible display



Rugged structure

Certifications



Warranty





Portining scale

CRS SERIES

Dimensions

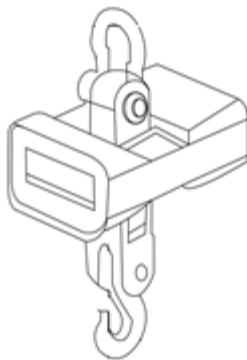
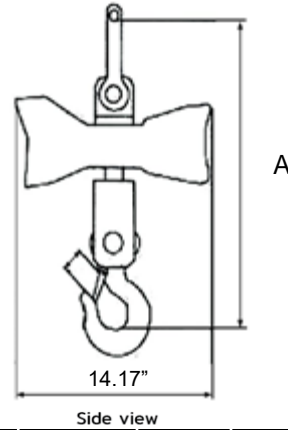
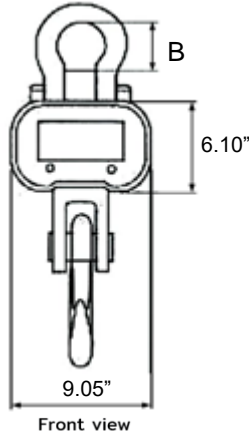


Table 1

MODEL	A	B	C	W	D	H
CRS 5000/10000	28.74 "	3.93 "	2.16 "	18.11 "	10.23 "	15.74 "
CRS-HD 10000/20000	33.46 "	4.72 "	2.70 "	22.84 "	11.02 "	17.71 "
CRS-HD 15000/30000	35.40 "	5.51 "	2.70 "	30.70 "	12.99 "	19.68 "

MODEL	Net weight	Total net weight	U.P.P	W.P.P
CRS 5000/10000	53.00 lb	62.00 lb	24	1525.00 lb
CRS-HD 10000/20000	97.00 lb	111.00 lb	16	1591.73 lb
CRS-HD 15000/30000	132.00 lb	167.00 lb	6	833.34 lb

Table 2

Technical specifications

Dimensions

External dimensions	See table 1
Packaging dimensions	See table 1 W,D,H
Gross weight	See table 2
Shipping Weight	See table 2

Construction

Scale Construction	Steel construction

Logistic data

Units per pallet	See table 2 U.P.P
Weight per pallet	See table 2 W.P.P
Dim. per pallet	44.88" X 51.96" X 103.54"

Electrical data

Power supply	110/220VAC, 50/60 Hz
Battery	Rechargeable Battery
Battery Life	100 Hours (no backligh) Aprox 6 Hours (Suspend mode)
Charging time	12 Hours
Display	LED

Performance data

Capacity	11000.00 lb/ 22000.00 lb/ 35000 lb
Minimal division	5.00 lb/ 10.00 lb/ 10.00 lb
Maximum tare	11000.00 lb/ 22000.00 lb/ 35000 lb
Operation temperature	14°F to 104°F (-10°C to 40°C)
Storage temperature	-4°F to 122°F (-20°C to 50°C)

Additional data

Accuracy Class	III
Warranty	1 year