



# Counting scale

## QC SERIES

Models:  
**QC5/10L**  
**QC20/40L**



### Product features

- Available in 10 and 40 lb capacities
- Toggles between kilograms and pounds
- Robust stainless steel construction
- LED display with backlight
- 200 hours rechargeable battery
- 50 memories for unit weight
- Tare function
- RS 232 serial communication

### Product highlights



More weight capacity to count



50 memories tare and weight



Easy and faster view

### Certifications

### Warranty






# Counting scale

## QC SERIES

### Dimensions

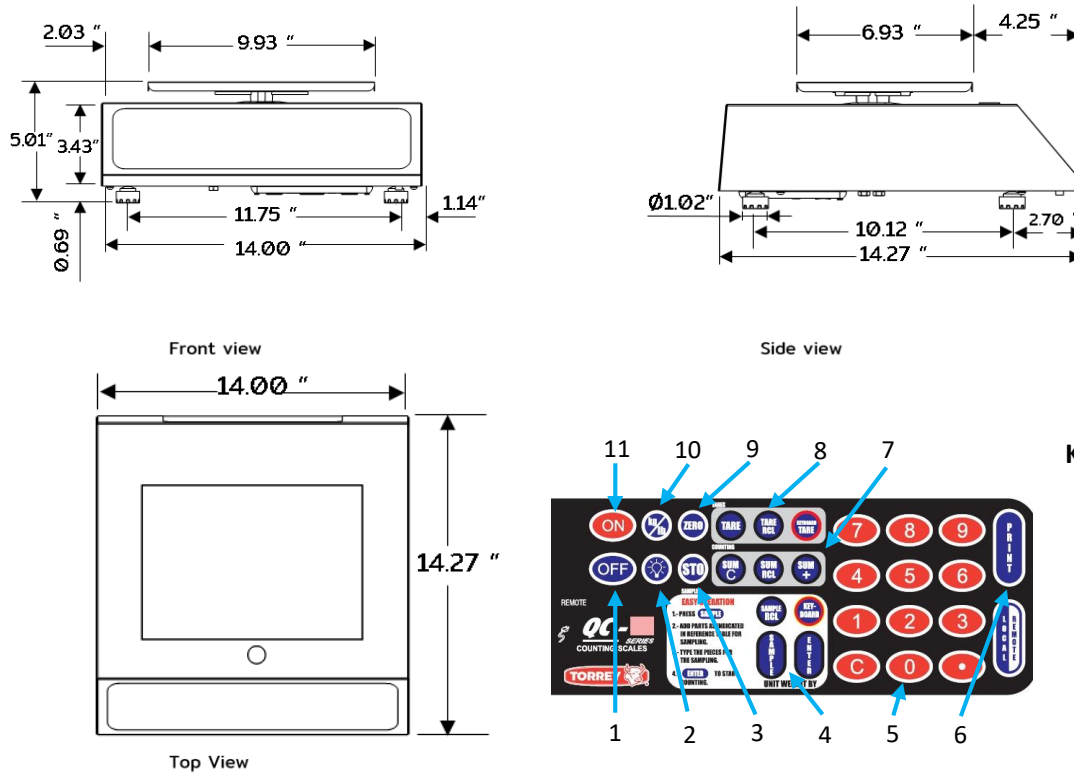

#### Keypad Overview

- 1- OFF
- 2- LCD BACKLIGHT ON/OFF
- 3- STOCK TO MEMORY
- 4- SAMPLE KEYS
- 5- NUMERIC KEYPAD
- 6- PRINT KEY
- 7- COUNTING KEYS
- 8- TARES KEYS
- 9- ZERO KEY
- 10- UNITS KEY
- 11- ON

### Technical specifications

#### Dimensions QC-5/10L

|                             |                              |
|-----------------------------|------------------------------|
| <b>External dimensions</b>  | W: 13.97" D: 13.97" H: 5.01" |
| <b>Packaging dimensions</b> | W: 17.32" D: 17.32" H: 6.88" |
| <b>Gross weight</b>         | 12.8 lb                      |
| <b>Shipping Weight</b>      | 18.7 lb                      |
| <b>Plate dimensions</b>     | W: 9.93" D: 6.93" H: 1"      |

#### Construction

|                              |                              |
|------------------------------|------------------------------|
| <b>Scale Construction</b>    | Stainless steel construction |
| <b>Plate holder material</b> | High strength aluminium      |
| <b>Leveling feet</b>         | 4                            |

#### Logistic data

|                          |                          |
|--------------------------|--------------------------|
| <b>Units per pallet</b>  | 44                       |
| <b>Weight per pallet</b> | 866.8 lb                 |
| <b>Dim. per pallet</b>   | 55.11" X 30.31" X 27.16" |

#### Electrical data

|                      |                                 |
|----------------------|---------------------------------|
| <b>Power supply</b>  | 110/220VAC - 9VDC 500mA         |
| <b>Battery</b>       | Rechargeable Battery 6.5V, 4A/h |
| <b>Battery Life</b>  | 200 Hours (no backligh) Aprox 6 |
|                      | Hours (Suspend mode)            |
| <b>Charging time</b> | 12 Hours                        |
| <b>Display</b>       | LCD with Backligh               |

#### Performance data

|                              |                               |
|------------------------------|-------------------------------|
| <b>Capacity</b>              | 10 lb / 40 lb                 |
| <b>Minimal division</b>      | 0.001 lb / 0.005 lb           |
| <b>Maximum tare</b>          | 500 lb / 1000 lb              |
| <b>Operation temperature</b> | 14°F to 104°F (-10°C to 40°C) |
| <b>Storage temperature</b>   | -4°F to 122°F (-20°C to 50°C) |

#### Additional data


|                              |                |
|------------------------------|----------------|
| <b>Connectivity</b>          | RS232 Serial   |
| <b>Software PC available</b> | Software scale |
| <b>Accuracy Class</b>        | III            |
| <b>Warranty</b>              | 1 year         |




# Counting scale

## QC SERIES


### Dimensions

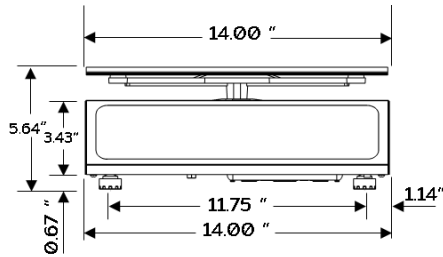


Front view

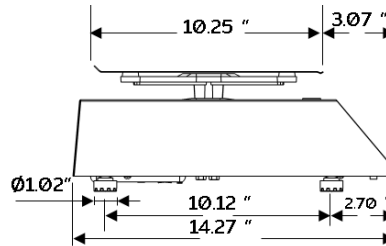

Side view

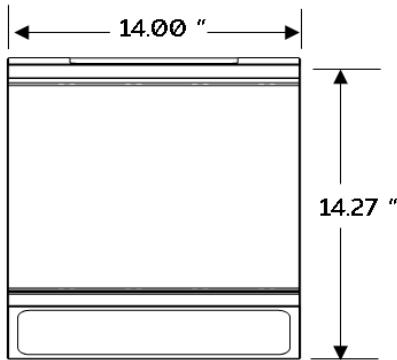

Top View

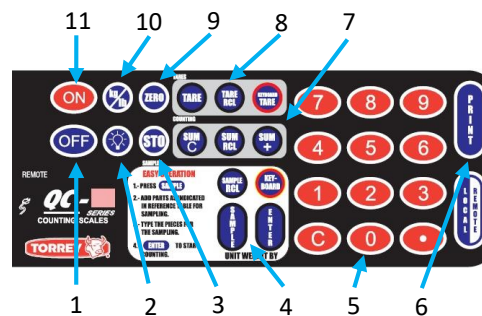

#### Keypad Overview

- 1- OFF
- 2- LCD BACKLIGHT ON/OFF
- 3- STOCK TO MEMORY
- 4- SAMPLE KEYS
- 5- NUMERIC KEYPAD
- 6- PRINT KEY
- 7- COUNTING KEYS
- 8- TARES KEYS
- 9- ZERO KEY
- 10- UNITS KEY
- 11- ON

### Technical specifications

#### Dimensions QC-20/40L

|                             |                              |
|-----------------------------|------------------------------|
| <b>External dimensions</b>  | W: 13.97" D: 13.97" H: 5.01" |
| <b>Packaging dimensions</b> | W: 17.32" D: 17.32" H: 6.88" |
| <b>Gross weight</b>         | 12.8 lb                      |
| <b>Shipping Weight</b>      | 18.7 lb                      |
| <b>Plate dimensions</b>     | W: 9.93" D: 6.93" H: 1"      |

#### Construction

|                              |                              |
|------------------------------|------------------------------|
| <b>Scale Construction</b>    | Stainless steel construction |
| <b>Plate holder material</b> | High strength aluminium      |
| <b>Leveling feet</b>         | 4                            |

#### Logistic data

|                          |                          |
|--------------------------|--------------------------|
| <b>Units per pallet</b>  | 44                       |
| <b>Weight per pallet</b> | 866.8 lb                 |
| <b>Dim. per pallet</b>   | 55.11" X 30.31" X 27.16" |

#### Electrical data

|                      |  |
|----------------------|--|
| <b>Power supply</b>  | 110/220VAC - 9VDC 500mA                              |
| <b>Battery</b>       | Rechargeable Battery 6.5V, 4A/h                      |
| <b>Battery Life</b>  | 200 Hours (no backligh) Aprox 6 Hours (Suspend mode) |
| <b>Charging time</b> | 12 Hours   |
| <b>Display</b>       | LCD with Backligh                                    |

#### Performance data

|                              |                               |
|------------------------------|-------------------------------|
| <b>Capacity</b>              | 10 lb / 40 lb                 |
| <b>Minimal division</b>      | 0.001 lb / 0.005 lb           |
| <b>Maximum tare</b>          | 500 lb / 1000 lb              |
| <b>Operation temperature</b> | 14°F to 104°F (-10°C to 40°C) |
| <b>Storage temperature</b>   | -4°F to 122°F (-20°C to 50°C) |

#### Additional data

|                              |                |
|------------------------------|----------------|
| <b>Connectivity</b>          | RS232 Serial   |
| <b>Software PC available</b> | Software scale |
| <b>Accuracy Class</b>        | III            |
| <b>Warranty</b>              | 1 year         |