



# Receiving scale

## SR SERIES

Model:  
**SR-50/100**



### Product features

- Available in 100 lb capacity
- Toggles between kg, lb and oz with one button
- Large LCD display with backlight
- Carbon steel case
- PC communication
- Cable in spiral for easy handling
- Tare function

### Product highlights



LCD display and backlight



Resistant structure



Easy to use

### Certifications



### Warranty









# Receiving scale

## SR SERIES

### Dimensions

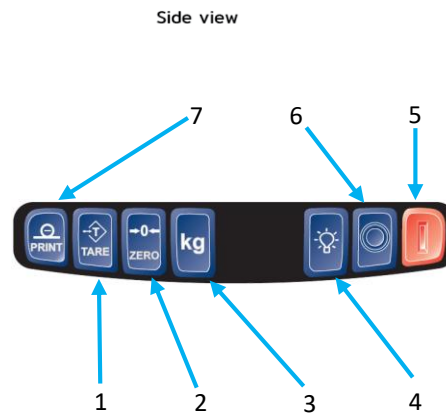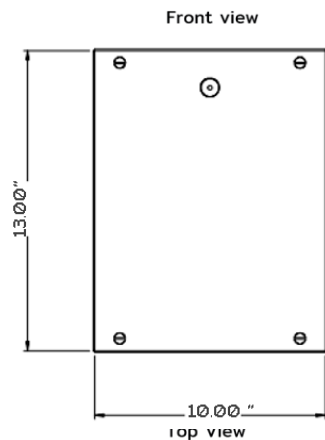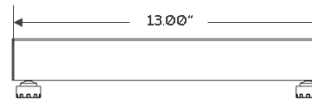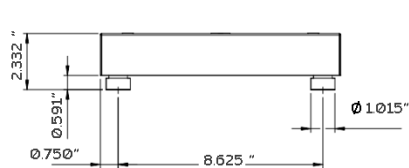

#### Keypad Overview

- 1- TARE KEY
- 2- ZERO KEY
- 3- UNITS KEY
- 4- OFF KEY
- 5- ON KEY
- 6- BACKLIGHT KEY
- 7- PRINT KEY

### Technical specifications

#### Dimensions

|                             |                              |
|-----------------------------|------------------------------|
| <b>External dimensions</b>  | W: 13.00" D: 10.00" H: 2.33" |
| <b>Packaging dimensions</b> | W: 14.24" D: 14.96" H: 8.66" |
| <b>Gross weight</b>         | 11.46 lb.                    |
| <b>Shipping Weight</b>      | 15.00 lb.                    |
| <b>Plate dimensions</b>     | W: 13.00" D: 10.00" H: 2.33" |

#### Construction

|                              |                                  |
|------------------------------|----------------------------------|
| <b>Scale Construction</b>    | Food grade stainless steel       |
| <b>Platform Construction</b> | Food grade stainless steel       |
| <b>Plate holder material</b> | High strength reinforced plastic |
| <b>Leveling feet</b>         | 4                                |

#### Logistic data

|                          |                          |
|--------------------------|--------------------------|
| <b>Units per pallet</b>  | 81                       |
| <b>Weight per pallet</b> | 1069.2 lb.               |
| <b>Dim. per pallet</b>   | 44.88" X 51.96" X 78.74" |

#### Electrical data

|                      |  |
|----------------------|--|
| <b>Power supply</b>  | 110/220VAC - 9VDC 500mA                              |
| <b>Battery</b>       | Rechargeable Battery 6V, 950mA/h                     |
| <b>Battery Life</b>  | 100 Hours (no backligh) Aprox 6 Hours (Suspend mode) |
| <b>Charging time</b> | 12 Hours   |
| <b>Display</b>       | LCD with Backlight                                   |

#### Performance data

|                              |                               |
|------------------------------|-------------------------------|
| <b>Capacity</b>              | 100 lb                        |
| <b>Minimal division</b>      | 0.02 lb                       |
| <b>Maximum tare</b>          | 100 lb                        |
| <b>Operation temperature</b> | 14°F to 104°F (-10°C to 40°C) |
| <b>Storage temperature</b>   | -4°F to 122°F (-20°C to 50°C) |

#### Additional data

|                              |                |
|------------------------------|----------------|
| <b>Communication</b>         | Serial RS-232  |
| <b>Software PC available</b> | Software scale |
| <b>Accuracy Class</b>        | III            |
| <b>Warranty</b>              | 1 year         |