

## Receiving scale EQB-W SERIES



### **Product features**

- LED display with backlight
- Heavy duty platform

Model:

EQB-50/100-W

- Robust stainless steel construction
- Hermetically sealed display
- Toggles between kilograms and pounds
- Tare function
- RS 232 serial comunication

# **Product highlights**



Electronic scale 100 % accurate



Practical and portable



Large solid platform

### Certifications







www.torrey.net



## Receiving scale EQB-W SERIES

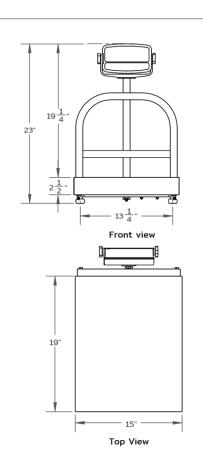

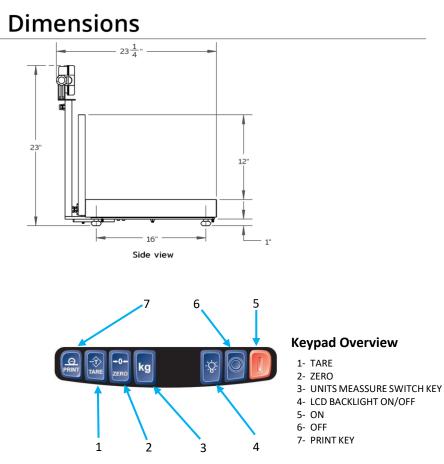

## **Technical specifications**

#### **Dimensions**

| External dimensions  | W: 15" D: 23.25" H: 23"      |
|----------------------|------------------------------|
| Packaging dimensions | W: 24.40" D:19.29 " H: 7.87" |
| Gross weight         | 39.06 lb.                    |
| Shipping Weight      | 43.20 lb.                    |
| Plate dimensions     | W: 15.00" D: 19.00" H: 2.50" |
|                      |                              |

#### Construction

| Scale Construction    | Food grade stainless steel       |
|-----------------------|----------------------------------|
| Platform Construction | Food grade stainless steel       |
| Plate holder material | High strength reinforced plastic |
| Leveling feet         | 4                                |
|                       |                                  |
|                       |                                  |

### Logistic data

| · <b>J</b>        |                          |
|-------------------|--------------------------|
| Units per pallet  | 24                       |
| Weight per pallet | 817 lb.                  |
| Dim. per pallet   | 44.88" X 48.03" X 55.81" |
|                   |                          |
|                   |                          |
|                   |                          |
|                   |                          |

### **Electrical data**

| Power supply  | 110/220VAC - 9VDC 500mA          |
|---------------|----------------------------------|
| Battery       | Rechargeable Battery 6V, 950mA/h |
| Battery Life  | 100 Hours (no backligth) Aprox 6 |
|               | Hours (Suspend mode)             |
| Charging time | 12 Hours                         |
| Display       | LCD with Backligth               |

### **Performance data**

| Capacity              | 20 lb                         |
|-----------------------|-------------------------------|
| Minimal division      | 0.005 lb                      |
| Maximum tare          | 20 lb                         |
| Operation temperature | 14°F to 104°F (-10°C to 40°C) |
| Storage temperature   | -4°F to 122°F (-20°C to 50°C) |
|                       |                               |

### **Additional data**

| Connectivity          | RS232 Serial   |
|-----------------------|----------------|
| Software PC available | Software scale |
| Accuracy Class        |                |
| Warranty              | 1 year         |
|                       |                |
|                       |                |

ORREY AMERICA 1203 N POST OAK RD. SUITE 100 Houston, TX, 77055

TORREY reserves the right to improve, enhance o modify features and specifications without prior notice.